

eCall Router - User Manual

OECON Products & Services GmbH

Version 4.4.1: Core Version 4.1

Table of Contents

1. Change History	1
2. Introduction.....	3
3. References	4
4. Login Page	4
5. Calls Page	4
6. Dispatch Page	7
7. Fetches Page.....	8
8. Activity Log	9
9. Users	10
10. Groups.....	11
11. System Configuration Page	15
12. Geofencing.....	18
13. Server Administration	19
13.1. Components.....	19
13.2. Asterisk.....	20
13.3. Apache HTTPD	22
13.4. PostgreSQL.....	22

1. Change History

4.4.1 (06. Jul 2026)

- Fixed display of Euro NCAP OSD on Dispatch page

4.4.0 (01. Jul 2026)

- MSD label change: Renamed ID to MSD Format Version
- MSD label change: Renamed Number of Passengers to Number of Occupants
- UI: Menu bar always visible when page content is scrollable
- Added support for Euro NCAP OSD with OID 8.1
- When an OSD is received with an unknown OID or is malformed, a warning is displayed
- When a MSD is received with unknown extensions, a warning is displayed
- Added group configuration option to send NG MSD Ack when blocking calls

4.3.3 (22. Jun 2026)

- Cosmetic update to version information presentation

4.3.2 (29. Apr 2026)

- Added support for Ubuntu 26.04

4.3.1 (17. Apr 2026)

- Fix: In rare cases a NG MSD could not be processed because the SIP INVITE was not detected in time

4.3.0 (13. Feb 2026)

- Added group configuration parameters for call transfer mode when using NG eCall.

4.2.1 (14. Nov 2025)

- When receiving a SIP INFO request with unknown content a 200 OK response will be sent to ensure calls don't get terminated
- Changes to customer specific interface

4.2.0 (07. Jul 2025)

- Changed behavior when receiving a 408 Timeout SIP response: Call will not get terminated anymore

4.1.0 (03. Jun 2025)

- Added an updated inband modem worker implementation based on PJSIP. Worker

implementation in use can be switched on the system configuration page. For the time being the legacy implementation stays the default

4.0.2 (16. Apr 2025)

- EN16102: Fixed WSDL output to contain correct service URL when running behind a reverse proxy
- Enhanced SIP INVITE for PSAP callback in NG eCall scenario by adding Priority, Accept, and Recv-Info headers (according to 3GPP TS 24.229 V19.2.0 clause 5.1.6B).

4.0.1 (24. Jan 2025)

- Fixed start.sh script to point to /etc/ecall-router4-application.properties
- Added parameter `no-wait` to `/callIvs` - Network interfaces v.1.14

4.0.0 (01. Sep 2024)

- Modernized user interface, added dark mode
- Added support for Ubuntu 24.04 and Asterisk 20.7.0

3.12.0 (12. Jul 2024)

- Added "Block All Incoming Calls"

3.11.0 (17. May 2023)

- Added X-Proxy-Group-Name to configure group assignment of incoming operator calls
- Added support to copy SIP headers from operator INVITE to IVS INVITE

3.10.0 (20. Mar 2023)

- Extended "eCall Center controls AL-ACK" feature

3.9.0 (06. Mar 2023)

- Fixed MSD decoding with missing vehicle direction
- Fixed Asterisk crash on early NG MSD retransmission
- Added worker on demand feature

3.8.0 (08. Dec 2022)

- Added eCall mode for inbound calls

3.7.0 (11. Oct 2022)

- Added support for persistent block list
- Network interfaces v.1.12

3.6.0 (23. Mar 2022)

- Upgrade to Asterisk 16.24.1
- Network interfaces v1.11

3.5.0 (11. Jan 2022)

- Added allow list feature
- Network interfaces v1.9

3.4.0 (27. Oct 2021)

- Added support for MSDv3
- Network interfaces v1.8

3.3.0 (10. Aug 2021)

- Added support for EN16102 (license restricted)

3.2.0 (20. Apr 2021)

- Added support for incoming operator calls (see chapter 12.2.3.2 for details)
- Added support to copy SIP headers from incoming call to operator call

3.1.0 (26. May 2020)

- eCall Mode group configuration option only affects outbound calls
- Fixed initial map display on dispatch page
- Made MSD retransmissions more robust against CRC errors

3.0.0 (31. Mar 2020)

- Support for Next Generation eCall
- License Keys
- Workstation Phone Number on Dispatch is saved per user

2. Introduction

This document describes the user interface of the eCall Router. To access the user interface a web browser with activated JavaScript is required. The following browsers are supported:

- Google Chrome
- Mozilla Firefox
- Microsoft Edge

3. References

[1] eCall Router – Network Interfaces v1.14

[2] Intelligent Transport Systems – ESafety – eCall high level application requirements (HLAP), CEN/TC 278, EN 16062

4. Login Page

To login to the system a web browser is required. Enter the URL `http://<server-ip-address>` into the address bar of your browser. The IP address has to be replaced by the actual configured IP address of your eCall Router.

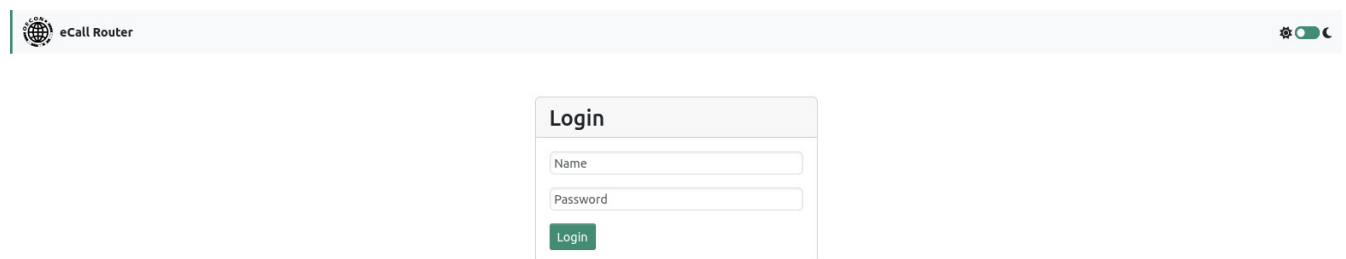


Figure 1. Login Page

You will then be asked to enter the login password. The standard user and password on delivery are admin and 1234.

5. Calls Page

After login you will be redirected to the calls page.

Calls

Dispatch

Fetches

Activity Log

Configuration

admin

Export

Show 10 records per page

Filter:

	Begin	End	Duration	I/O	IVS	Dialed	Number of MSD	Group
+	2024-07-18 10:04:02.487 +0200	2024-07-18 10:04:05.557 +0200	00:00:03		+491919275129	87	1	default
+	2024-07-18 10:04:02.225 +0200	2024-07-18 10:04:05.288 +0200	00:00:03		+496894729883	87	1	default
+	2024-07-18 10:02:59.608 +0200	2024-07-18 10:03:02.702 +0200	00:00:03		+492626652686	87	1	default
+	2024-07-18 10:02:58.529 +0200	2024-07-18 10:03:02.610 +0200	00:00:04		+497674558645	87	0	default
+	2024-07-18 09:15:15.894 +0200	2024-07-18 09:15:18.973 +0200	00:00:03		+490318573034	87	1	default
+	2024-07-18 09:15:14.641 +0200	2024-07-18 09:15:17.735 +0200	00:00:03		+495764067963	87	1	default
+	2024-07-17 14:10:21.406 +0200	2024-07-17 14:10:24.473 +0200	00:00:03		+492819435703	87	1	default
+	2024-07-17 14:04:45.175 +0200	2024-07-17 14:04:49.233 +0200	00:00:04		+499870244883	87	0	default
+	2024-07-17 14:04:38.584 +0200	2024-07-17 14:04:41.662 +0200	00:00:03		+493383312216	87	1	default
+	2024-07-17 13:59:26.769 +0200	2024-07-17 13:59:29.854 +0200	00:00:03		+493508272545	87	1	default

Showing 11 to 20 of 300 records

First

Previous

1

2

3

4

5

...

30

Next

Last

Figure 2. Calls Page

On this page you can find a table of all calls that the eCall Router has processed so far. For every call you can see the time of begin and end, the duration, incoming or outgoing call, the phone number of the calling IVS, the dialed number (only for incoming calls), the number of MSD that were transmitted during the call and the group to which the call has been assigned.

The calls are ordered by the time of their arrival from new to old.

To left of each call is a plus icon that can be clicked to expand a text area with additional information of the call. If one or more MSD were transmitted they will be decoded and shown here.

eCall Router

Calls
Dispatch
Fetches
Activity Log
Configuration

admin

● 2024-07-18 14:06:57.148 +0200	2024-07-18 14:07:00.213 +0200	00:00:03		+490979585483	87	1	default
---------------------------------	-------------------------------	----------	--	---------------	----	---	---------

MSD
1. MSD

```

0221100430e30a51439e2955d438000004940acff3405a450c24f441213876403f91000
000000000000000000000000000000000000000000000000000000000000000000
000000000000000000000000000000000000000000000000000000000000000000
000000000000000000000000000000000000000000000000000000000000000000
          
```

UUID	16902232-3075-42d6-b779-14f83d84aa22
Type	NG
Received	14:06:57.123

Field	Value
ID	2
Message Identifier	1
Activation	MANUAL
Call Type	EMERGENCY
Position Confidence	LOW_CONFIDENCE
Vehicle Type	MOTORCYCLES_L7E
VIN	ECALLEXAMPLE02019
Propulsion	Gasoline
Event Time	1508278452 (2017-10-18 00:14:12.000 +0200)
Position	52.28842 10.53020
	Position
Position N-1	52.28831 10.53112
	Position N-1
Position N-2	Invalid
Vehicle Direction	256
Number of Passengers	n/a
Optional Additional Data OID	n/a
Optional Additional Data	n/a

Time	Type	Direction	SIP Message
14:06:57.123	EXTERNAL	received	INVITE sip:87@192.168.17.218:5060 SIP/2.0
14:06:57.181	EXTERNAL	sent	SIP/2.0 200 OK

Time	Level	Text
14:06:57.150	debug	incoming call from +490979585483
14:06:57.153	debug	found SIP INVITE for external channel

eCall Router

[Calls](#)
[Dispatch](#)
[Fetches](#)
[Activity Log](#)
[Configuration ▾](#)

admin ▾

● 2024-07-18 14:06:57.148 +0200	2024-07-18 14:07:00.213 +0200	00:00:03	📞 +490979585483	87	1	default
---------------------------------	-------------------------------	----------	-----------------	----	---	---------

1. MSD

Field	Value
MSD	0021100430e30a51439e2955d438008004940acf3405a459c24f441213878403f91000 00 00 00
UUID	16902232-3075-42d6-b779-14f83d84aa22
Type	NG
Received	14:06:57.123
ID	2
Message Identifier	1
Activation	MANUAL
Call Type	EMERGENCY
Position Confidence	LOW_CONFIDENCE
Vehicle Type	MOTORCYCLES_L7E
VIN	ECALLEXAMPLE02019
Propulsion	Gasoline
Event Time	1508278452 (2017-10-18 00:14:12.000 +0200)
Position	52.28842 10.53020 Position
Position N-1	52.28831 10.53112 Position N-1
Position N-2	Invalid
Vehicle Direction	256
Number of Passengers	n/a
Optional Additional Data OID n/a	

The top of the calls page contains an expandable map. You can drag it down with the gray bar just below the navigation bar if it is not visible. To display an MSD's position on the map you can click the crosshair icon on the left side of the MSD panel.

Calls

Dispatch

Fetches

Activity Log

Configuration

admin

Export

From

08 / 02 / 2024

00:00

To

08 / 02 / 2024

23:59

Delimiter

:

☐ Include call logs

Export

Cancel

Show

10

records per page

Filter:

Begin	End	Duration	I/O	IVS	Dialed	Number of MSD	Group
2024-07-18 10:04:02.487 +0200	2024-07-18 10:04:05.557 +0200	00:00:03		+491919275129	87	1	default
2024-07-18 10:04:02.225 +0200	2024-07-18 10:04:05.288 +0200	00:00:03		+496894729883	87	1	default
2024-07-18 10:02:59.608 +0200	2024-07-18 10:03:02.702 +0200	00:00:03		+492626652686	87	1	default
2024-07-18 10:02:58.529 +0200	2024-07-18 10:03:02.610 +0200	00:00:04		+497674558645	87	0	default
2024-07-18 09:15:15.894 +0200	2024-07-18 09:15:18.973 +0200	00:00:03		+490318573034	87	1	default
2024-07-18 09:15:14.641 +0200	2024-07-18 09:15:17.735 +0200	00:00:03		+495764067963	87	1	default
2024-07-17 14:10:21.406 +0200	2024-07-17 14:10:24.473 +0200	00:00:03		+492819435703	87	1	default
2024-07-17 14:04:45.175 +0200	2024-07-17 14:04:49.233 +0200	00:00:04		+499870244883	87	0	default
2024-07-17 14:04:38.584 +0200	2024-07-17 14:04:41.662 +0200	00:00:03		+493383312216	87	1	default
2024-07-17 13:59:26.769 +0200	2024-07-17 13:59:29.854 +0200	00:00:03		+493508272545	87	1	default

Showing 11 to 20 of 300 records

First

Previous

1

2

3

4

5

...

30

Next

Last

Figure 5. Call Export

The export function can be used to export calls and MSDs as a CSV file. If the “Include call logs” checkbox is ticked then the complete call debug log will be included as a multiline field in the CSV file. If a filter is active then the filter value will also be taken into account for the export.

6. Dispatch Page

The dispatch page shows active and recent calls and the last received MSD for each call. Calls that ended more than 5 minutes ago will be removed from the call list at the top left of the page. The amount of time can be configured on the configuration page. The currently selected call will not get removed as long as the page is not being reloaded or a new call is coming in.

The admin user can see every call that the eCall Router processes, ordinary users can only see calls that belong to their respective groups.

Buttons below the map list allow a user to request a MSD, to send an application layer cleardown, to call an IVS or to hang up an active call.

Besides the IVS phone number calling an IVS requires the user to enter a workstation phone number to ensure that the call to IVS gets forwarded to the correct workstation.

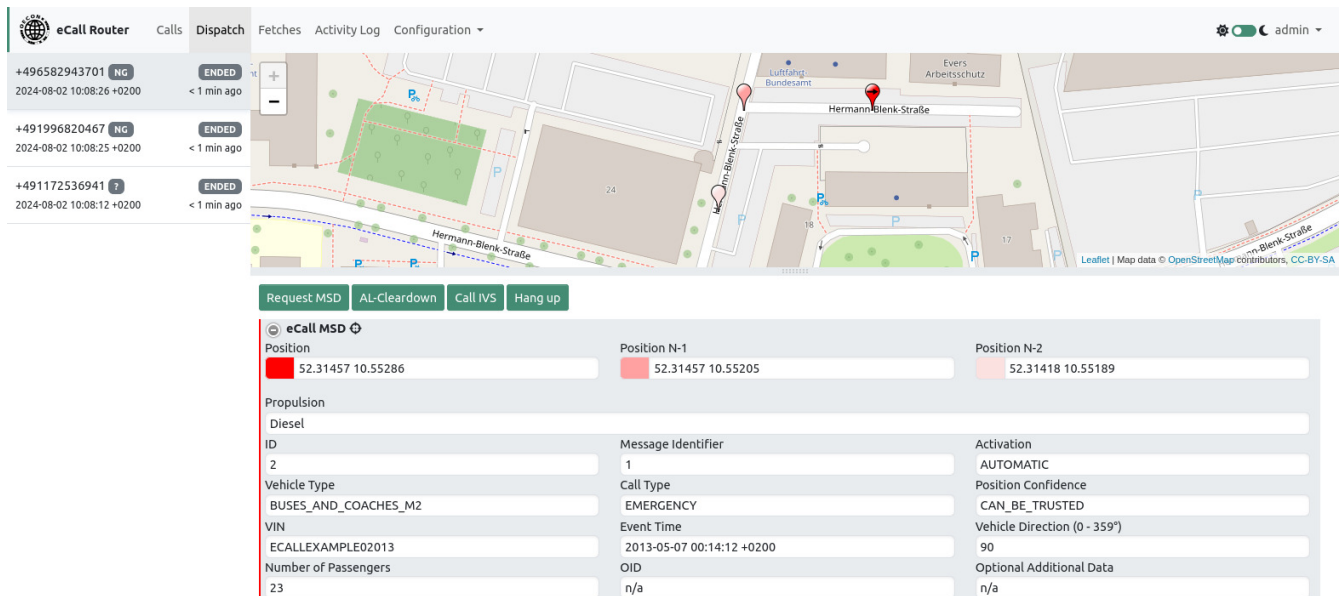


Figure 6. Dispatch Page

If VIN decoding has been enabled on the system configuration page then additional information is being shown below the decoded MSD fields.

7. Fetches Page

On this page every fetch of a workstation (see [1]) is recorded. This page is only visible if you are logged in as the admin user.

 eCall Router Calls Dispatch Fetches Activity Log Configuration   admin			
Show 10 records per page Filter:			
Time	Workstation ID	IVS	Type of Fetch
2023-05-16 16:04:40.093 +0200	123	1111	callivs
2023-05-16 14:58:27.477 +0200	123	1111	callivs
2022-03-23 17:09:30.274 +0100	alpha	1111	resendMsd
2022-03-23 17:09:20.187 +0100	alpha	1111	resendMsd
2022-03-23 17:08:24.048 +0100	alpha	1111	resendMsd
2022-03-23 17:07:30.869 +0100	alpha	1111	resendMsd
2022-03-23 16:53:19.214 +0100	alpha	1111	resendMsd
2022-03-23 16:50:27.273 +0100	alpha	1111	resendMsd
2022-03-23 16:49:37.156 +0100	alpha	anonymous	resendMsd
2022-03-23 13:47:05.007 +0100	alpha	anonymous	resendMsd
Showing 1 to 10 of 15 records First Previous 1 2 Next Last			

Figure 7. Fetches Page

Like on the calls page you can get additional information by clicking on the plus sign on the left of a row or use the filter to show only records concerning a specific phone number.

8. Activity Log

On this page the activity log of the system is shown. The activity log contains information about user actions including login, logout and downloading of audio call recordings. The page is only visible to the admin user.

 eCall Router Calls Dispatch Fetches Activity Log Configuration   admin		
Show 10 records per page Filter:		
Time	Username	Details
2021-06-29 13:50:59 +0200	admin	Login successful from 127.0.0.1
2021-07-13 12:49:10 +0200	admin	Login successful from 127.0.0.1
2021-07-15 10:01:40 +0200	admin	Login successful from 127.0.0.1
2021-08-02 09:27:17 +0200	admin	Login successful from 127.0.0.1
2021-08-10 15:30:43 +0200	user	Login successful from 0:0:0:0:0:1
2021-08-10 15:31:30 +0200	user	Logged out
2021-08-10 15:31:37 +0200	admin	Login successful from 0:0:0:0:0:1
2021-10-27 12:57:39 +0200	admin	Login successful from 127.0.0.1
2021-12-01 12:51:26 +0100	admin	Login successful from 127.0.0.1
2021-12-13 11:20:10 +0100	admin	Login successful from 127.0.0.1
Showing 1 to 10 of 89 records First Previous 1 2 3 4 5 ... 9 Next Last		

Figure 8. Activity Log

9. Users

This page allows viewing, adding, editing and locking user accounts. A new user can be created by clicking the link at the top of the page. Every user has to be assigned to a group. A user may only see calls that belong to his group.

 eCall Router Calls Dispatch Fetches Activity Log Configuration   admin			
New User			
Show 10 records per page Filter:			
Username	Group	Role	Account Status
testuser	testgroup	ROLE_USER(AUDIO)	Active
user	default	ROLE_USER(AUDIO)	Active
Showing 1 to 3 of 3 records First Previous 1 Next Last			


Figure 9. Users

Only users with the „Download audio call recordings“-permission are able to see and download call recordings from the “Calls” page.

10. Groups

This page allows viewing, adding and editing groups. A default group called default exists on delivery. New groups can be created by clicking the link at the top of the page.

Configuration options per group can be expanded by clicking the plus sign next to the group in the table.

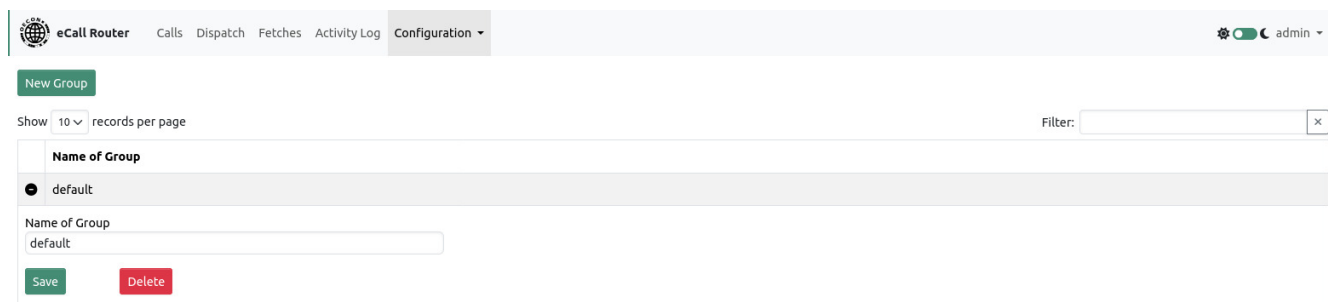

The screenshot shows the 'eCall Router' configuration interface. The 'Configuration' tab is active. A 'New Group' button is at the top left. Below it, a 'Show 10 records per page' and a 'Filter' input are visible. The main table has a header 'Name of Group' and a single row for the 'default' group. Below the table, there is a form to edit the group name, currently set to 'default'. At the bottom of the form are 'Save' and 'Delete' buttons.

Figure 10. Group configuration - Name of Group

The name of a group can be chosen freely but must be unique. The default group may be renamed but it will still always be the default group. Deleting a group will also delete all associated users and calls. The default group cannot be deleted.




The screenshot shows the 'eCall Center Login Credentials' configuration section. It contains a table with four columns: 'Active', 'URL', 'PSAP-ID', and 'PSAP-Password'. There are five rows in total. The first two rows are pre-filled with 'http://localhost:9999/center', 'psap1', and '1234', and 'http://localhost:8095/i18n', 'psap2', and '1234'. The remaining three rows are empty. A 'Save' button is at the bottom left.

Active	URL	PSAP-ID	PSAP-Password
☐	http://localhost:9999/center	psap1	1234
☐	http://localhost:8095/i18n	psap2	1234
☐			
☐			
☐			

Figure 11. Group configuration - eCall Center

You can configure up to five eCall Centers. See [1] for additional information on eCall Center and data transmission procedures. Note that you don’t have to configure an eCall Center here. If no eCall Center is configured or reachable you will just have no additional information to a MSD that could be provided by the eCall Center.

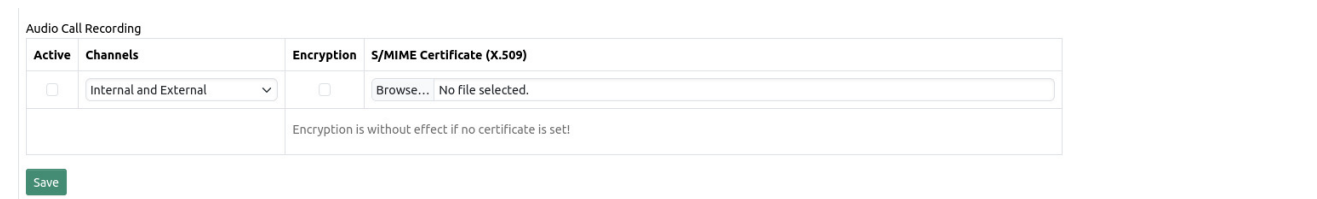

The screenshot shows the 'Audio Call Recording' configuration section. It contains a table with four columns: 'Active', 'Channels', 'Encryption', and 'S/MIME Certificate (X.509)'. There are two rows in total. The first row has 'Internal and External' selected in the 'Channels' dropdown, and 'Browse...' in the 'S/MIME Certificate' field. The second row is empty. A 'Save' button is at the bottom left.

Active	Channels	Encryption	S/MIME Certificate (X.509)
☐	Internal and External	☐	Browse... No file selected.
☐			

Figure 12. Group configuration - Audio call recording

Audio call recording can be enabled per group. The “Channels” setting determines the extent of the recording. Internal only means that only audio of the agent will be recorded, external only means that only audio of the calling IVS will be recorded, while Internal and External means that both

channels will be recorded and mixed into a single WAV file.

Encryption can be enabled to encrypt all audio files that are being recorded by the eCall Router. Besides setting encryption to “enabled” you also have to upload a X.509 S/MIME certificate for the encryption feature to work. The public key contained within the certificate will be used for encryption so that only the owner of the corresponding private key will be able to decrypt a call audio recording.

Note: Audio call recording requires appropriate Asterisk configuration which is not enabled by default (see [Audio call recording](#))

The screenshot shows two configuration sections for SIP headers. The first section, 'SIP Headers (IVS → Operator)', has a description: 'These sip headers will be copied from an incoming INVITE from IVS to corresponding outgoing INVITE to operator.' It contains a table with two rows: 'def' and 'Foo'. Each row has a 'SIP Header Name' input field, a down arrow button, and a delete 'X' button. A 'Save' button is at the bottom. The second section, 'SIP Headers (Operator → IVS)', has a description: 'These sip headers will be copied from an incoming INVITE from operator to corresponding outgoing INVITE to IVS.' It contains a table with two rows: 'opivs1' and 'opivs2'. Similar to the first section, it has input fields, arrow buttons, and delete buttons. A 'Save' button is also present at the bottom.

Figure 13. Group configuration – SIP headers

In these two sections SIP headers can be defined which will be copied from either an incoming IVS INVITE to an outgoing operator INVITE or from an incoming operator INVITE to an outgoing IVS INVITE.

The screenshot shows the 'Automatic Database Maintenance' configuration. It includes a 'Next scheduled delete action:' section with a 'Time' dropdown set to '00' and a 'Days' section with radio buttons for 'Every day', 'Days of week', and 'Days of month'. Below this is a 'Delete action:' section with a red box highlighting the text: 'Delete all calls in the database that are older than 30 days. and Delete all call audio recordings that are older than 30 days.' At the bottom, there are three buttons: 'Execute delete action now', 'Start schedule', and 'Stop schedule'.

Figure 14. Group configuration - Manual delete action

Using the delete function calls can be permanently removed from the database. Possibly existing audio recordings will be removed from the file system.

The manual delete action is called by clicking the "Execute delete action now" button. After confirmation by the user all calls are deleted from the database that are older than the specified number of days and all call recordings are deleted from the file system that are older than the specified number of days. Note that deleting a call from the database must also delete the associated call recording which is why the second number of days has to be less than or equal to the first number of days.

Automatic Database Maintenance

Next scheduled delete action:

Time: 00 : 00

Days: ☒ Every day
☐ Days of week: ☐ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat ☐ Sun [All](#)
☐ Days of month:
☐ Jan ☐ Feb ☐ Mar ☐ Apr ☐ May ☐ Jun
☐ Jul ☐ Aug ☐ Sep ☐ Oct ☐ Nov ☐ Dec
Months: [All](#)

Delete action: Delete all calls in the database that are older than 30 days.
and
Delete all call audio recordings that are older than 30 days.

[Execute delete action now](#) [Start schedule](#) [Stop schedule](#)

Figure 15. Group configuration - Scheduled delete action

The scheduled delete action allows you to create a schedule to run periodically delete operations. A schedule includes the specification of a time, a daily selection, a selection of months, and the age of calls (in days) that are to be deleted during the execution of the operation. After clicking on the button "start schedule" the set values are accepted and the time of the next scheduled deletion is being displayed.

A scheduled delete action can be cleared by clicking the "stop schedule" button.

Dialed Phone Number	→	Operator Phone Number
*		5555

Dialed Phone Number (for Group Assignment)
0112

T4 Timer (seconds)
5

T8 Timer (seconds)
20

Call Setup Mode
Call operator when MSD transmission is complete

NG Transfer Mode With MSD
Transfer call with 302 redirect

NG Transfer Mode Without MSD
Transfer call with 302 redirect

DTMF Trigger for MSD Retransmission
Deactivated

Inband Modem Operation Mode
PUSH

Send Network Echo Canceller Disabler
off

eCall Center controls AL-ACK
off

eCall Mode For Inbound Calls
Try Next Generation with fallback to Inband

eCall Mode For Outbound Calls
Always Inband

Block All Calls Unless on Allow List
off

Block All Incoming Calls
on, with 603

Send NG Ack When Blocking Calls
off

[Save](#)

Figure 16. Group configuration - Misc settings

The operator phone number determines which phone number gets called when the eCall Router has to forward an incoming call to a human dispatcher.

Dialed Phone Number expects a POSIX regular expression to be matched against the called phone

number of an incoming call and determines to which group the incoming call will be assigned. It is best to leave this setting empty for the default group as the default group will always be used as a fallback when no other group matches.

The parameters T4 timer and T8 timer define certain timeouts that may be triggered during a MSD transmission. The meaning of the parameters is described in [2].

The call setup mode can be changed to forward calls immediately to the respective operator phone number (described above) or to wait for the initial MSD transmission to complete. Note that the human dispatcher will hear nothing and will not be able to speak during a MSD transmission.

The parameters "NG Transfer Mode with MSD" and "NG Transfer Mode without MSD" only apply when eCall Mode for inbound calls is set to "Always NG" and call setup mode is set to transfer. The first parameter applies when the SIP INVITE contains an NG MSD, the second parameter applies when the SIP INVITE contains no MSD. If set to "Transfer call with 302 redirect" then the inbound call will not be accepted but instead the INVITE will be answered with a 302 response. If set to "Accept call then transfer with REFER" the inbound call will be accepted and then immediately transferred via a SIP REFER request.

The parameter "DTMF Trigger for MSD Retransmission" can be used to request a MSD retransmission upon detection of the configured DTMF (Dual-tone multi-frequency) signal. During an ongoing call the human dispatcher can generate a DTMF signal using his telephone keypad. A received MSD will be acknowledged with a positive acknowledgement.

The parameter "Inband Modem Operation Mode" can be used to switch between PUSH and PULL mode. In PUSH mode the inband modem waits until the initiation signal of an IVS is detected before sending the MSD request. In PULL mode the inband modem immediately starts to send the MSD request after call establishment.

Setting the parameter "eCall Center controls AL-ACK" to "on" means that the eCall Router will only send ACKs during In-band modem transmission if the response of the eCall Center to the saveMsd request contains a HTTP header "Send-AL-ACK" that is set to "true". If it is found to be set to "false" then no ACK will be sent, the call will be hung up immediately and all calls from the calling IVS will be blocked for the next few minutes. Note that this setting is a deviation to the European eCall standard. If the parameter is set to "on (also check allow list if SIP INVITE contains no NG MSD)" then NG MSDs that are found in an SIP INVITE will be transmitted to the eCall Center before the call is accepted. If the "Send-AL-ACK" header is set to "false" the call will be declined, otherwise the call will be accepted. Also, if no NG MSD is found in the SIP INVITE then the allow list will be checked and the call will only be accepted if the IVS phone number is on the allow list.

eCall Mode For Inbound Calls affects only incoming calls. The default setting is "Try Next Generation with fallback to Inband" which will try to find a MSD inside the initial SIP INVITE and if it doesn't find one will activate the inband modem. "Always Next Generation" will never activate the inband modem and only look for MSDs inside the SIP INVITE. "Always Inband" will always activate the inband modem and ignore data inside the SIP INVITE.

eCall Mode For Outbound Calls affects only outgoing calls. The default setting is "Always Inband" which means only inband modem MSD transmissions are activated. Setting it to "Always Next Generation" means only MSD transmissions through SIP INFOs are being used. "Try Next Generation with fallback to Inband" means that first a SIP INFO will be sent to request a MSD, only

if this is unsuccessful the inband modem will be activated. “IVS phone number database lookup with fallback” will check the last received MSD from the call database and set the mode accordingly, if there has been no MSD received yet from the IVS phone number in question the behavior is like “Try Next Generation with fallback to Inband”.

Setting the parameter “Block All Calls Unless on Allow List” to “on” means that the eCall Router will only accept incoming calls if the IVS phone number is currently on the list of allowed numbers. An IVS phone number can be added to the allow list through the Network Interfaces API. Any phone number added to the allow list will be automatically removed after 5 minutes.

With setting „Block All Incoming Calls“ all incoming calls can be rejected either with a busy signal (486) or a declined signal (603). This setting has a higher priority than the allow list, which means a call will be rejected even if the IVS phone number is on the allow list.

When "Send NG Ack When Blocking Calls" is set to "on", blocking a call causes the final SIP INVITE response to include the NG acknowledgement if the SIP INVITE contains an NG MSD, and the eCall Mode for Inbound Calls enables Next Generation eCall. Note that this also causes MSD processing as if the call had not been blocked, including display on the Dispatch page.

11. System Configuration Page

On this page various system configuration options can be changed.

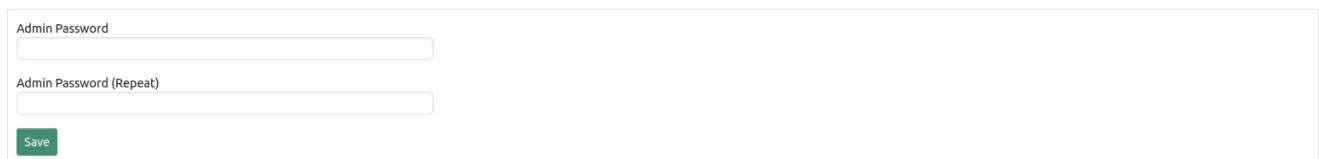


Figure 17. System Configuration Page – Admin Password

To change the admin password enter the new password twice and click the save button below.

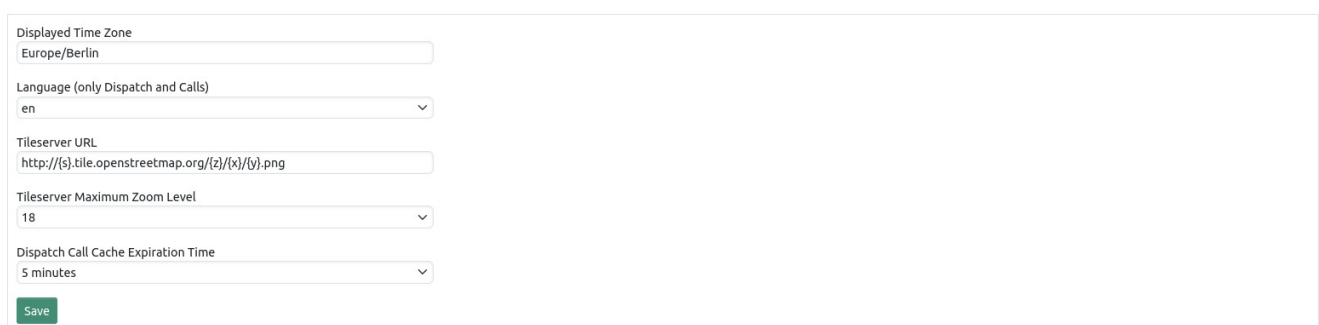


Figure 18. System Configuration Page – Display Settings

You can change the displayed time zone here. This affects all time stamps on all pages.

The language setting affects only the language on the calls and dispatch pages.

You can also change the URL of the Tileserver that provides the map on the dispatch and calls pages.

Changing call cache expiration time affects how long calls are being displayed on the dispatch page.

VIN Decoder (External Service)

☐ Active

URL

API Key

API Secret

Figure 19. System Configuration Page - VIN Decoder

To enable the VIN decoder on the dispatch page you have to create an account at <https://vindecoder.eu> and request an API key and secret. The VIN decoding feature on the dispatch page can only work if your browser has internet access.

Next scheduled delete action: **No active schedule**

Time: :

Days: ☒ Every day
☐ Days of week: ☐ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat ☐ Sun [All](#)
☐ Days of month:
Months: ☐ Jan ☐ Feb ☐ Mar ☐ Apr ☐ May ☐ Jun
☐ Jul ☐ Aug ☐ Sep ☐ Oct ☐ Nov ☐ Dec
[All](#)

Delete action: Delete all fetches in the database that are older than days.

Figure 20. System Configuration Page – Manual delete action

Using the delete function data can be permanently removed from the database.

The manual delete action is called by clicking the "Execute delete action now" button. After confirmation by the user all fetches are deleted that are older than the specified number of days.

Next scheduled delete action: **No active schedule**

Time: :

Days: ☒ Every day
☐ Days of week: ☐ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat ☐ Sun [All](#)
☐ Days of month:
Months: ☐ Jan ☐ Feb ☐ Mar ☐ Apr ☐ May ☐ Jun
☐ Jul ☐ Aug ☐ Sep ☐ Oct ☐ Nov ☐ Dec
[All](#)

Delete action: Delete all fetches in the database that are older than days.

Figure 21. System Configuration Page – Scheduled delete action

The scheduled delete action allows you to create a schedule to run periodically delete operations. A schedule includes the specification of a time, a daily selection, a selection of months, and the age of calls (in days) that are to be deleted during the execution of the operation. After clicking on the button "start schedule" the set values are accepted and the time of the next scheduled deletion is being displayed.

A scheduled delete action can be cleared by clicking the "stop schedule" button.

License Key

```

-----BEGIN PGP MESSAGE-----
Licensee: eCall Router Manual (aa:bb:cc:dd:ee:ff)
Expires: 2029-08-10

yMIgATrCy8zIwRgXI4xX1WH2TsbTByNL2X0L0/VKKkrS1sxtR0bLlBQKkst
Ks7Mz10yUjDUAQsUFOWnlCaXAAMUUp0LTJ0gojmZyaL5xampIGGfxKjBd/E
ohKQSC5UaWpFQWZraJfI3sJyFLXwELX8AAQl5aaWFIKkQRbChTKS9dNTU7M
y0GpLykqTYW0EokFpcU5esm5+cWJBA0TutLzCLG5FemFpcnVupm5pwkFqUL
JqdiqKhKzEwpxacAaGtmYL5Vch5eRWMJLYn4FKQaGhrhky8pKC7QL5gtz1Co
qCg10TWzLBWfupTUXJzUit2S10ISXVioQVSAFNRCQjKjsiLPLEoFsmUcx0T
dRNTUoBBdw5KMw0rRf0rVCMrIzMrU0MRmW0Idl6u2kMH7rAwMnIwSLeygZIG
AxenACzdTP/AwZBr23HLx1Wbd5x0W6NYE6I4s5FGHv9G2RULheyW1rjMvnM/
07D824f05+ppXhZnWZjkF5wv3VzCY/FpwYwvBQtqK++xvOXq3X9uUtFUTQa1
rfLnTrmLXLhY07n9bGqg7auYSQ5r/9wrSW304d66wfxM2IsHkw3yE4LandY2
0fEViAts3MJ/Sfx9wtpTheFba54kSZz6JxssXu0b+/evht6F0N/BaxPLndde
npXccnj006PeFZMKJXcQf72ov7dr75XZJusSBQ51G7meFRUWeaqlTcHy7IT6
4zNcfs+wm7y56aBvcCSzZYvRLZj62Hm3vFV37vmtddqLKQ/fUrw/+axZufHNs
SpZco9j8HREln6RCF1790LP2yMw+Qcmr446XZ5+9yhP6tvZPXqXn+8RJmRzX
/Bars/06q+3aNgvfZJ05Q/gnnxdhH+y/x8C/1Z04ryb2cuemVjsT0eIz/8SW
feZbsdHioLrNfZlv6fNuOP3gyv+t3W1r9X1Z+ua4EFd8w4Z+/N3dh+b3Zy
b1jClq8f7wf4fJ8MAAAA//8DBB==
=Zky/
-----END PGP MESSAGE-----

```

Save

Figure 22. System Configuration Page – License Key

You need a valid license key to run eCall Router (Version 3 and up). Please copy and paste the license key you have been sent from OECON P&S Support in the text field in this section. The software will instantly show the Licensee and the expiration date of your license once you press the Save button.

Without a valid license key installed eCall Router will show a red banner on every page.

The software will still receive and save eCalls without a valid license but you can't see call details or decode MSDs. As soon as a valid license key is entered you can inspect all previously recorded calls.

Number of Worker Processes

10

Worker SIP Start Port

5062

☒ Start Workers on Demand

If activated, worker processes will only be started when required and immediately stopped once they are no longer needed.

Worker Executable

Legacy

The PJSIP based worker is actively maintained and continually enhanced for stability and reliability. The legacy worker will eventually be phased out.

Save

Figure 23. System Configuration Page - More settings

The parameters “Number of Worker Processes” and “Worker SIP Start Port” depend on the type of telephony hardware of the eCall Router. Usually there is no need to change them. In the default configuration all workers are started when the systems starts and they will keep running as long as the system runs. It also possible to switch to an on demand mode. In this mode a worker will only be started once it has been requested and stopped once it is not needed anymore. The on demand mode therefore provides better resource utilization.

You can switch between the legacy worker implementation and the PJSIP worker implementation. The latter one is actively maintained and continually enhanced for stability and reliability. The legacy worker will eventually be phased out but stays the default choice for the time being.

View internal log file

Download all internal log files

Figure 24. System Configuration Page – Accessing log files

For troubleshooting purposes, it is possible to access the internal log files of system through the web interface. Use of this function is not required during normal operation.




Figure 25. System Configuration Page – Reboot and shutdown

With the “reboot system” button, the system can be restarted. The system takes about 30 seconds to return to operational state.

With the “shutdown system” button, the system can be shut down. You need physical access to the device to turn the system back on.

12. Geofencing

The Geofencing feature allows choosing different operator phone numbers according to the MSD position of the caller. If the MSD could not be received or the position is outside of all geofences then the eCall Router will fall back to the configuration from the miscellaneous section of the group configuration page.

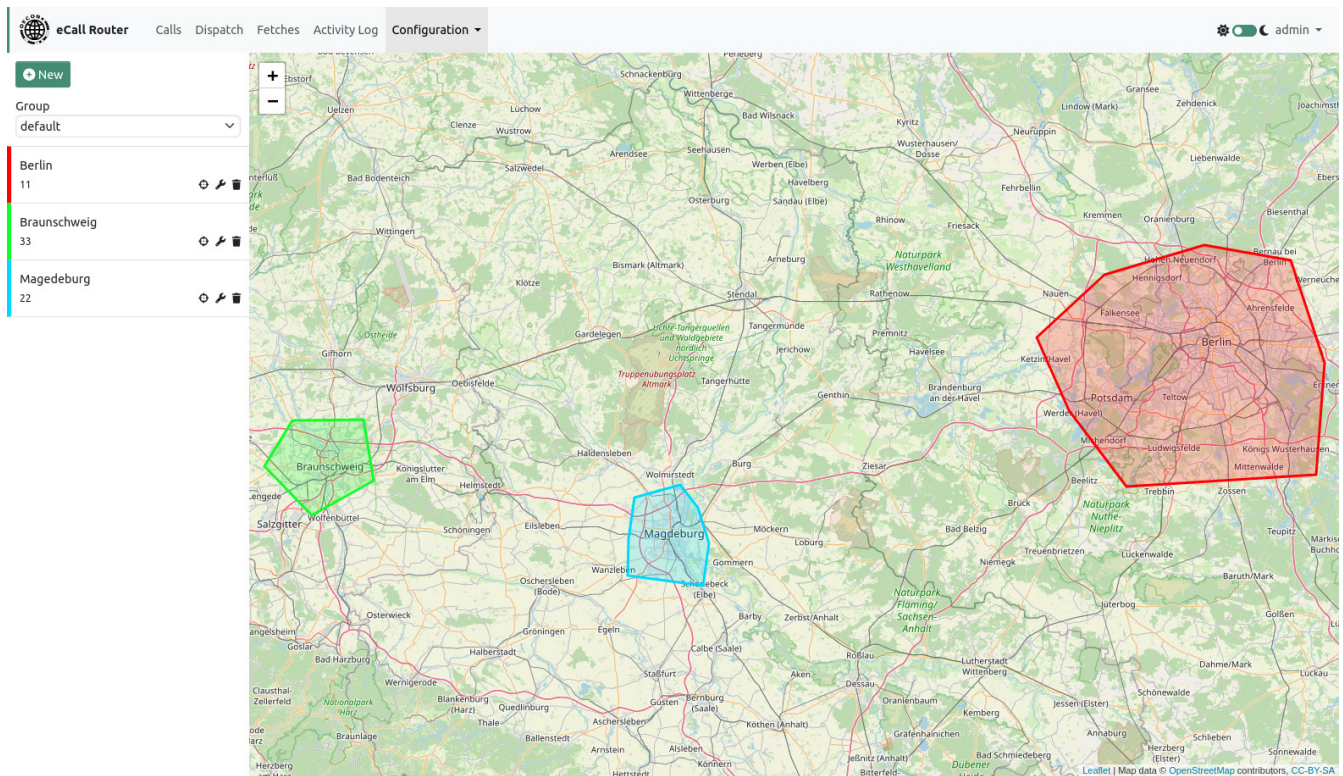


Figure 26. Geofencing Page – Show geofences per group

The geofencing page shows all geofences for the currently selected group on a map.

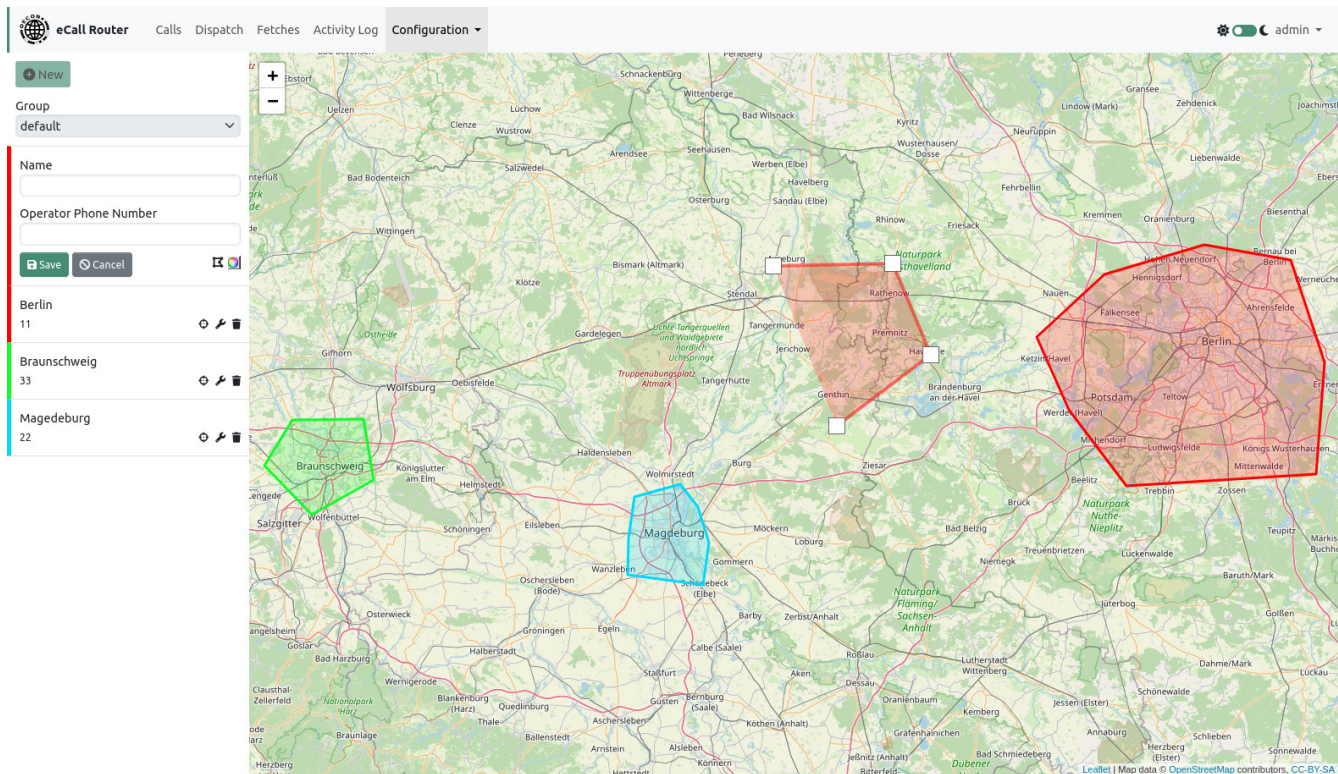


Figure 27. Geofencing Page – Creating a new geofence

Create a new geofence by clicking the “New” button. Enter a name and an operator phone number. Then create a polygon on the map by clicking on the map. Close the polygon by clicking on the first point. You can change the color of the geofence by clicking on the color picker icon.

You can center, edit or delete a geofence by clicking on the buttons next to the name in the list of geofences on the left side of the page. When editing a geofence you can delete points by clicking on them and create new points by dragging the half transparent points between two existing points.

13. Server Administration

Server administration tasks have to be executed over a SSH connection. The SSH service is active by default on every eCall Router installation. The default user for administration tasks is `ecall`. On Ubuntu this user is allowed to use the `sudo` command to execute commands with root privileges. All of the following command should be executed with root privileges.

13.1. Components

The system components that are required to run:

- Asterisk
- Apache HTTPD
- PostgreSQL

All these components are automatically getting started when the system is being booted.

13.2. Asterisk

Asterisk is used for all external call handling and connects external calls to the eCall Router process that does call handling using Asterisk's ARI interface.

13.2.1. Starting, stopping, restarting Asterisk

```
service asterisk <start | stop | restart>
```

13.2.2. SIP configuration

SIP configuration can be found in `/etc/asterisk/pjsip.conf` and will be generated by the setup program.

13.2.3. Dial plan

The dial plan is configured in `/etc/asterisk/extensions.conf`. For inbound calls there is a section that forwards these calls to the ecall application (usually in a context named `default-in`):

```
[default-in]
exten => _[a-zA-Z.:0-9+].,1,NoOp()
    same => n,Set(CALLERID(num)=${IF($[ ${LEN(${CALLERID(num)})} > 0 ] ? ${CALLERID(num)}
: anonymous)})
    same => n,Set(audiofile=${SHELL(uuidgen -r):0:36})
; same => n,Monitor(,${audiofile},m)
    same => n,Stasis(ecall,${audiofile})
```

Audio call recording

To enable call recording of incoming calls the dial plan has to be adjusted. Each line containing “Monitor” must be enabled by removing the leading semicolon. For example:

```
; same => n,Monitor(,${audiofile},m)
```

to

```
same => n,Monitor(,${audiofile},m)
```

The default configuration contains three lines containing “Monitor” that must be enabled.

Incoming operator calls

By default all incoming calls will be regarded as calls from an IVS. If a call shall be regarded as a call from an operator then it is necessary to set the channel variable `X-Proxy-To-External` before calling the stasis app.

The value of the channel variable must be the phone number that will be used for the outgoing call to the IVS.

In this example the incoming call from the operator is handled by the `from-operator` context. The dialed number will be used in the outgoing call to the IVS in context `default-external-out`. Note that `from-operator` must be the configured context of the pjsip endpoint from which the operator call originates:

```
[from-operator]
exten => _[0-9+]!,1,NoOp()
    same => n,Set(X-Proxy-To-External=${EXTEN})
    same => n,Stasis(ecall)

[default-external-out]
exten => _[0-9+]!,1,NoOp()
    same => n,Set(audiofile=${X-Audio-File})
; same => n,Monitor(,${audiofile},m)
    same => n,Dial(PJSIP/${EXTEN}@pbx)
```

It is also possible to use a different context for the outgoing call to the IVS. In this case use `phone-number@context` as the value of `X-Proxy-To-External`.

In this example the context `from-operator-out` will be used for the outgoing call to the IVS:

```
[from-operator]
exten => _[0-9+]!,1,NoOp()
    same => n,Set(X-Proxy-To-External=${EXTEN}@from-operator-out)
    same => n,Stasis(ecall)

[from-operator-out]
exten => _[0-9+]!,1,NoOp()
    same => n,Set(audiofile=${X-Audio-File})
; same => n,Monitor(,${audiofile},m)
    same => n,Dial(PJSIP/${EXTEN}@pbx)
```

By default calls will be assigned to the default group. A variable `X-Proxy-Group-Name` can be used to change this behavior. In this example the calls will be assigned to a group named my-group:

```
[from-operator]
exten => _[0-9+]!,1,NoOp()
    same => n,Set(X-Proxy-To-External=${EXTEN})
    same => n,Set(X-Proxy-Group-Name=my-group)
    same => n,Stasis(ecall)
```

13.2.4. Log files

Asterisk log files can be found in `/var/log/asterisk`.

13.2.5. Starting, stopping, restarting eCall Router application

```
service ecall-router4 <start | stop | restart>
```

13.2.6. Log files

The eCall Router logs can be found under `/usr/local/ecall-router-current/logs`. This is the same log that can be accessed using the web interface.

13.3. Apache HTTPD

The Apache HTTPD is used to deliver the web interface to the connecting clients. It uses `mod_proxy` to relay requests to the eCall Router application.

13.3.1. Starting, stopping, restarting Apache HTTPD

```
service apache2 <start | stop | restart>
```

13.3.2. Log files

The apache log files containing general information about HTTP requests and responses can be found under `/var/log/apache2/`. Especially `access.log` and `error.log` can be of interest.

13.4. PostgreSQL

All configuration and call data of the eCall Router is stored inside a PostgreSQL database running on the same physical server as the eCall Router itself. The name of the database is `ecall_router4`. The name of the database user is `ecall` and the password is `ecall`. The user name and password cannot be changed and access to the database is only possible from localhost. The database can be accessed using the default command line client `psql`. Backups of the database can be created using `pg_dump`.

13.4.1. Starting, stopping restarting PostgreSQL

```
service postgresql <start | stop | restart>
```